


CB792

E-3/L-3 

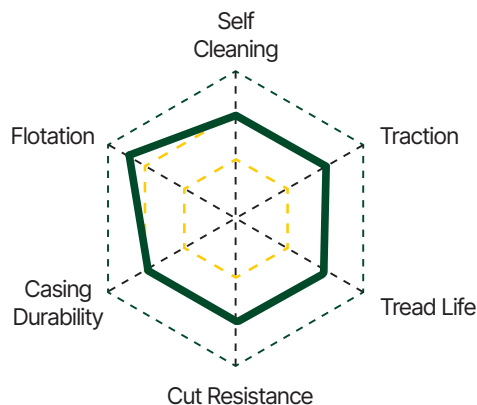

Latest design with alternating and multi-edged blocks offers better flotation and excellent traction on soft and muddy soil

Longer tread life due to the deeper tread depth and unique tread compound



Optimised Retreading Ability because of the robust casing

Additional protective sidewalls are shaped to minimize damage from cutting

Tyre Size	Star Rating	TRA Code	Service Index	Standard Rim	OD		SW		OTD		Inflated Pressure		Type
					mm	inch	mm	inch	mm	32ND	kPa	PSI	
550/65R25	★★	L-3	189A2	17.00 / 2.0	1400	55.1	545	21.5	33	42	625	91	TL
600/65R25	★★	E-3	178B	19.50 / 2.5	1415	55.7	605	23.8	35	44	425	62	TL
		L-3	195A2								625	91	
650/65R25	★★	E-3+	180B	19.50 / 2.5	1480	58.3	640	25.2	42	53	425	62	TL
		L-3+	200A2								625	91	
23.5 R25	★★	E-3+	185B	19.50 / 2.5	1615	64	595	23	38	48	525	76	TL
		L-3+	201A2								650	94	
26.5 R25	★★	E-3+	193B	22.00 / 3.0	1750	69	675	27	40	50	525	76	TL
		L-3+	209A2								650	94	
29.5 R25	★★	E-3+	200B	25.00 / 3.5	1875	74	750	30	44	55	525	76	TL
		L-3+	216B								650	94	