




# 331 HD

Alliance 331 Heavy Duty Flotation tread design is basically a high traction profile with good self cleaning characteristics suitable for on/off road service on tractors, cross country vehicles, trailers and implements. High load carrying capacity and low inflation pressure is the main characteristic of this tire. Strong nylon construction and compounds ensure long tyre life.

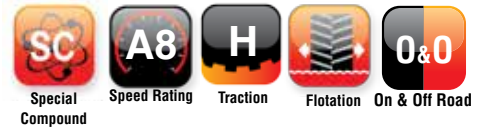

Size	Rim	Unloaded dimension		Loaded Static Radius	Rolling Circum	Load Index Speed Symbol	Infl. press bar psi	Recommend load, kg (lbs)									
		SW	OD					Speed, km/h (mph)									
		mm in	mm in					mm in	mm in	mm in	mm in	mm in	mm in	mm in	mm in	mm in	mm in
500/45-20	16.00DC	490	980	446	2910	164A6	6	7430	6980	5990	5670	5360	5040	4750	4500	4050	
		19.3	38.6	17.6	114.6	162A7	87	16370	15370	13190	12490	11810	11100	10460	9910	8920	
						160A8											
600/40-22.5 Available with steel breaker	20.00DC	600	1100	505	3280	173A6	6	9570	8990	7710	7310	6900	6500	6150	5800	5220	
		23.6	43.3	19.9	129.1	171A7	87	21080	19800	16980	16100	15200	14320	13550	12780	11500	
						169A8											
600/50-22.5	20.00DC	600	1205	547	3676	174A6	6	9900	9300	7980	7560	7140	6720	6300	6000	5400	
		23.6	47.4	21.5	144.7	172A7	87	21810	20480	17580	16650	15730	14800	13880	13220	11890	
						170A8											
650/45-22.5	20.00DC	645	1170	535	3567	173A6	4.5	9570	8990	7710	7310	6900	6500	6150	5800	5220	
		25.4	46.1	21.1	140.4	171A7	65	21080	19800	16980	16100	15200	14320	13550	12780	11500	
						169A8											
700/40-22.5	24.00DC	700	1230	559	3727	177A6	6	10730	10080	8650	8190	7740	7300	6900	6500	5850	
		27.6	48.4	22	146.7	175A7	87	23630	22200	19050	18040	17050	16080	15200	14320	12890	
						173A8											